


**PROUD OF WHAT
WE MAKE.
GOOD AT WHAT
WE DO.**

TECHNICAL DATA

CONTINETTE II

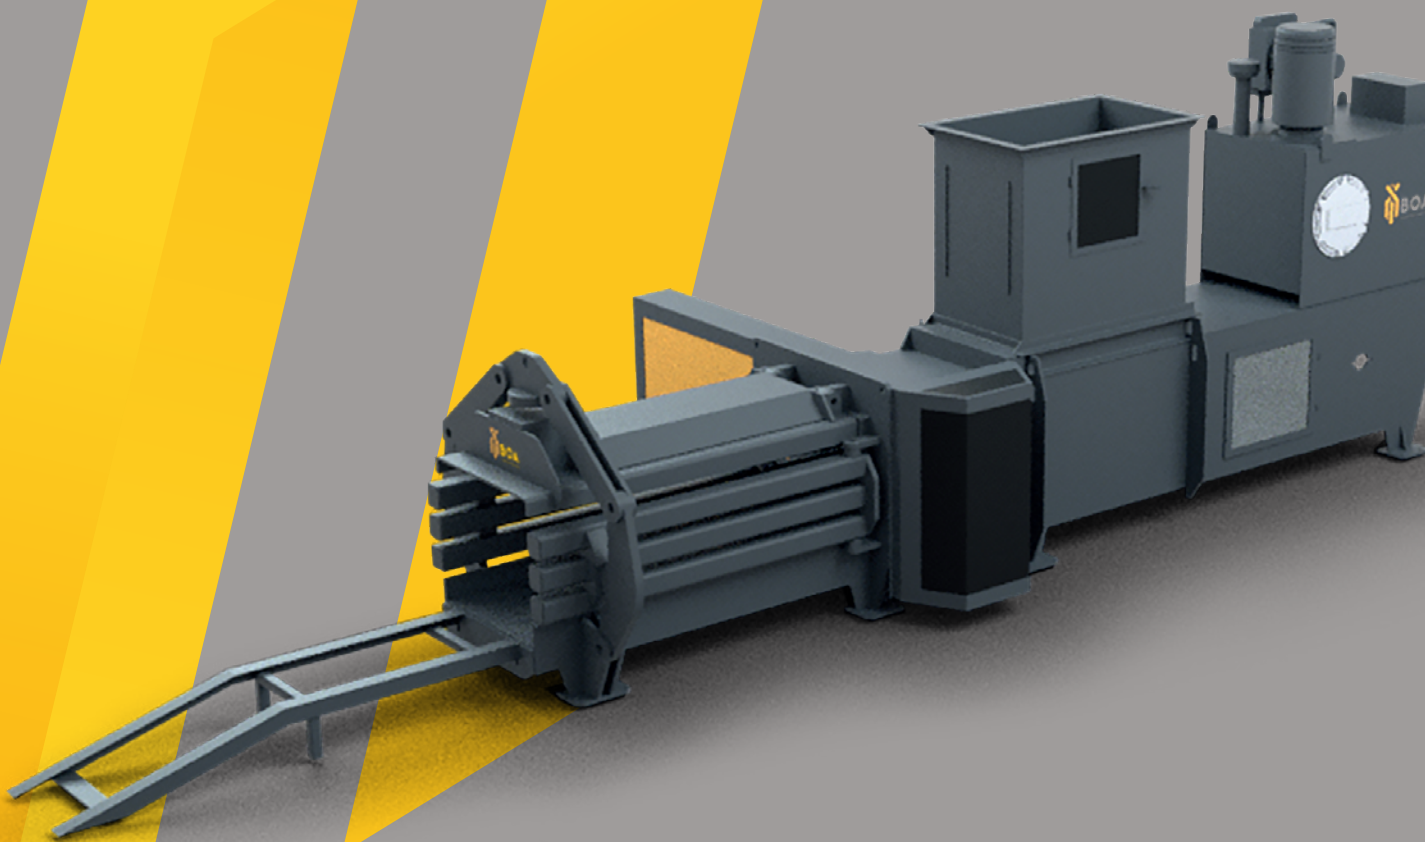

CONTINETTE II | TECHNICAL DATA

Drive hydraulic power unit	CONTINETTE II	
	22	kW
Main pump(s):	22	kW
Counter pressure pump:	3	kW
Filter pump:	2.2	kW
Oil cooler:	1.5	kW
Operational voltage:	400/50	V/Hz
Insulation class	IP 55	
Operational hydraulic pressure:	280	bar
Oil tank capacity:	800	liter
Press force:	431 - 43	kN-t
Specific press force:	7.5	kg/cm ²
Press stroke:	1800	mm
Press channel dimensions W x H:	800 x 720	mm
Press chamber volume	1.0	m ³
Bale length (<i>adjustable</i>)	approx. 1300	mm
Bale weight indication (<i>material dependent</i>)	up to 380	kg
Press stroke volume without load	70 - 126	m ³ /h
Dimensions filling hopper L x W	257	m ³
Machine weight	4 horizontal	
Noise level	1200 x 720	
Average working cycle time	approx. 10	ton
Geluidsniveau	< 85	dB(A)
Gemiddelde cyclustijd belast	18.1	sec
Capacity <i>depends on a.o. material, material input and bale weight</i>		
density in hopper		
30 kg/m ³	4.4	t/h
60 kg/m ³	7.8	t/h
100 kg/m ³	11.5	t/h
150 kg/m ³	17.3	t/h

